

Change Order No. 01

Project Name: Weiss Lane Transmission Main Phase 1	Owner's Project No.: 1512-028-01
Project Owner and Address: City of Pflugerville 100 E. Main Street P O BOX 589 Pflugerville, TX 78691-0589	Date of Issuance: 2/22/2016
Project Contractor and Address: JKB Construction Co., LLC 350 N. Bagdad Road Leander, TX 78641	Date of Contract: 11/20/2015 (NTP on 11/24/2015)
	Contract Period: 116 Calendar Days

It is agreed to modify the Contract referred to above as follows:


Item #	Description Of Changes	Deduct from Contract	Change in Contract Price	Change in Contract Time
	Additional Excavation Depth Sta: 10+10 to 13+20 to Avoid Existing Utilities	310	LF	\$ 8,643.00
C.905	Additional Flowable Fill at Treatment Plant Driveway 4.5' Depth & Ford Driveway	76	SY	\$ 6,938.80
W1.17.A-24"	24" Ductile Iron Pipe, Class 350, Install Only-Pipe is Not Returnable. Pipe to be re-handled and shipped to Public Works	-370	LF	\$ (14,430.00)
W1.17.ARJ-24"	24" Ductile Iron Pipe with Restrained Joints, Class 350, Complete in Place	166	LF	\$ 20,086.00
	12" C900 DR-18 PVC Pipe with Restrained Joints, Complete in Place. Pipe installed along ROW of Weiss in bar ditch. Existing fiber optic line is running parallel to new main 2'; off centerline. Fiber will have to be hand excavated to assure the safety of the line. Proximity of existing roadway and powerlines cause production to drop drastically due to size of machines utilized, moving of excess material, and storage. Ditch line cannot be sloped safely, so utilization of trench shores is necessary.	427	LF	\$ 47,824.00
	Traffic Control-Flagger Setup and Lane Closure along Weiss for Bypass	1	LS	\$ 2,750.00
W1.17.B-Fittings	Ductile Iron Fittings, Complete in Place	1.00	TON	\$ 11,640.00
	Added Thrust Blocking to 24" Mechanically Restrained Fittings	57	CY	\$ 11,970.00
	Re-Survey of the Linework on School Property. Stakes removed by school contractor.	2492	LF	\$ 3,862.60
Difference Net =		N/A		\$ 99,104.40

Summary: It is agreed to modify the Contract referred to above as follows:

Contract Price prior to this Change Order: \$ 527,932.50	Contract Time prior to this Change Order Substantial (days and date): 96 days (2/29/16) Final (days and date): 116 days (3/20/16)
Net Increase (decrease) of this Change Order: \$ 99,104.40	Net Increase (decrease) of this Change Order 0 days
Revised Contract Price with all approved Change Orders: \$ 627,036.90	Revised Contract Time with all approved Change Orders Substantial (days and date): 96 days (2/29/16) Final (days and date): 116 days (3/20/16)

The changes included in this Change Order are to be accomplished in accordance with the terms, stipulations and conditions of the original Contract as though included therein.






Accepted for Contractor by: JKB Construction Co., LLC

2/23/14

Date:

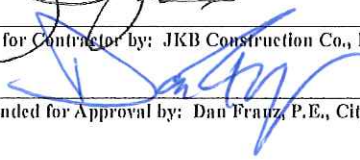
Recommended for Approval by: Dan Frautz, P.E., City Engineer

2/23/16

Date:

Approved for Owner by: Brandon Wade, City Manager

Attest:

Date:

Approved for Owner by: (Other - when required)

Date:

Distribution: Contractor _____ File _____ Field _____ Owner _____ Other _____