



6/28/2022

Brandon Pritchett
City of Plugerville
Public Utility Director

Ref. Carmel LS repairs


Below you will find our proposal for the following works as required:

- * Demolition, removal of (4) 8" discharge pipes, + - 40' (not to include reducer nor 90 bend
- * Removal of 4 guide rails.
- * Installation of (4) new DI P401 lined 8" discharge pipes. The pipe will be installed in three spool pieces, two to be flange on flange, the third one to be flange on plain end to be cut it on site and a restrained flange adapter will be used. All new 8" SS bolts and gasket kit will be used and provided by Prota.
- * Installation of existing guide rails, and brackets provided by the city of Pflugerville

Bypass operation :

- * Removal of spool piece inside the valve vault in order to turn one 8" elbows upwards to provide bypass discharge to force main.
- * Fuel and 24 man watch to be provided by Prota.
- * Airplugs to be installed in the upstream Manhole to be use as the bypass manhole just outside the fence of the lift station.


**The initial cleaning and draining of the list station to be provided by the city of Pflugerville.

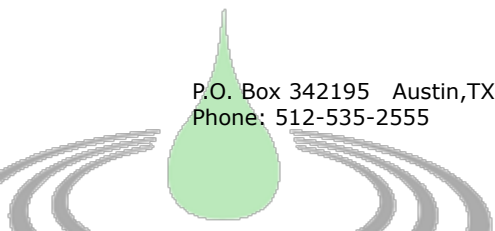

Time; 7 days
Cost; \$137,516.00

Please, feel free to contact us if you have any questions or comments.

Héctor O. Bravo
Vice President of Field Operations
Prota, Inc - **Utility Contractor**
4805 Doss Rd.
Austin, TX 78734
www.prota.biz
512-535-2555 Office
512-992-7200 Cell
512-535-5441 Fax

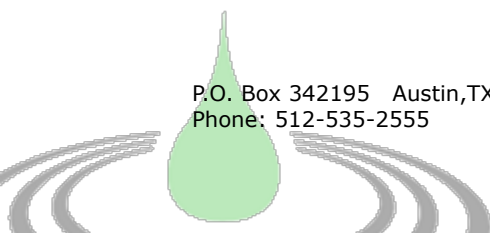

P.O. Box 342195 Austin, TX 78734
Phone: 512-535-2555

Fax: 512-535-5441

info@protaconstruction.com